SAMSUNG

About Samsung Electronics Co., Ltd.

Samsung Electronics Co., Ltd. inspires the world and shapes the future with transformative ideas and technologies. The company is redefining the worlds of TVs, smartphones, wearable devices, tablets, digital appliances, medical equipment, network systems, and semiconductor and LED solutions. For the latest news, please visit the Samsung Newsroom at news.samsung.com.

Smart Signage

For more information about Samsung Flip 3, visit www.samsung.com/business or www.samsung.com/displaysolutions

Copyright © 2022 Samsung Electronics Co. Ltd. All rights reserved. Samsung is a registered trademark of Samsung Electronics Co. Ltd. Specifications and designs are subject to change without notice. Non-metric weights and measurements are approximate. All data were deemed correct at time of creation. Samsung is not liable for errors or omissions. All brand, product, service names and logos are trademarks and/or registered trademarks of their respective owners and are hereby recognized and acknowledged.

Samsung Electronics Co., Ltd. 416, Maetan 3-dong, Yeongtong-gu, Suwon-si, Gyeonggi-do 443-772, Korea

Interactive Display

Flip 3


Imagine a new era of learning




What is Samsung Flip 3?

Samsung Flip 3 is a powerful education solution that delivers interactive learning experiences. Developed specifically for the education market, Flip 3 provides educators with boundless resources and flexibility to create engaging lessons for a new era of learning. Flip 3 features immersive touchscreen and input technologies, enabling simultaneous multi-user writing to provide increased involvement while learning. To get the most out of Flip 3's powerful hardware, students and teachers can access both trusted, embedded content or preferred third-party software. Samsung's latest technology enables secure environments, while faster hardware increases student engagement. Power seamless learning experiences for everyone with Samsung Flip 3.

How does Samsung Flip 3 transform the classroom?

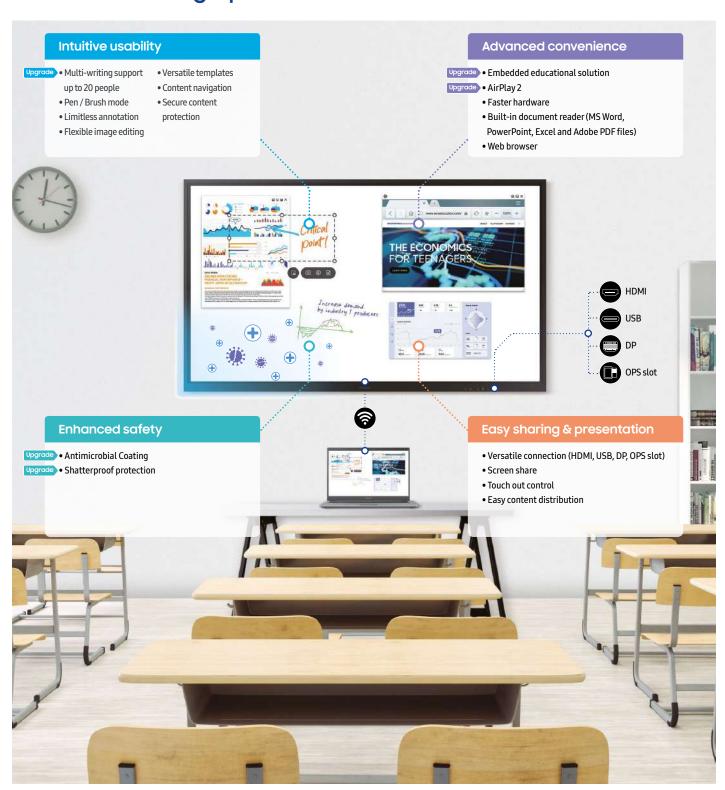


Intuitive usability

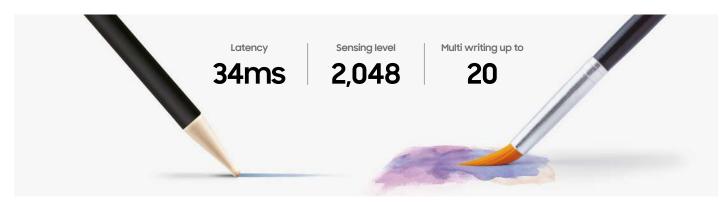

Unlock creativity with immersive touch technology Upgrade

Ideate and create with interactive touchscreen technology. With support for up to 20 inputs at once, sketch out ideas with swift drawing speed at just 34ms of latency or paint with real-world accuracy with 2,048 points of pressure built directly into the display.

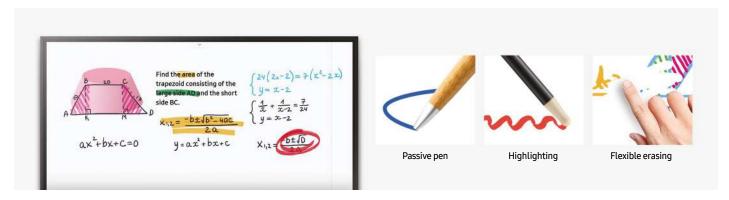

Create and solve without limits

Interactions are intuitively built for problem solving and creating. Use any object near you as a stylus to bring your ideas to life. Flip 3 distinguishes between inputs from thin or thick objects to simulate on-screen writing and highlighting. Or simply erase content with your finger or palm.

Enhanced safety



Keep the screen clean Upgrade

Thanks to an Antimicrobial Coating, Samsung Flip 3 inhibits microbial growth to help protect against certain bacteria. This enables teachers and students to stay focused on what's on the screen with peace of mind.




Minimize accidents and risks Upgrade

Samsung understands that accidents happen. To protect students and educators from injury, the Flip 3 screen is wrapped in a proprietary shatterproof film, ensuring the screen stays intact in the event of a break.

- ${}^{\star}\text{To perform its antibacterial function, this product has been treated with the biocidal substance Silver phosphate glass and the substance of the product has been treated with the biocidal substance of the product has been treated with the biocidal substance of the product has been treated with the biocidal substance of the product has been treated with the biocidal substance of the product has been treated with the biocidal substance of the product has been treated with the biocidal substance of the product has been treated with the biocidal substance of the product has been treated with the biocidal substance of the product has been treated with the biocidal substance of the product has been treated with the biocidal substance of the product has been treated with the biocidal substance of the product has been treated with the biocidal substance of the product has been treated with the biocidal substance of the product has been treated with the biocidal substance of the product has been treated with the biocidal substance of the product has been treated by the$
- * Antibacterial property does not completely protect users against bacteria and provides no protection against viruses including Covid-19.
- * Antimicrobial Coating is on surface of screen only and the effect may vary depending on conditions of use.* Antibacterial certification: UL2282 which is granted when the antibacterial effectiveness is more than 99%. (Test method/JIS Z 2801): after inoculation of 0.4cc of liquid with bacterial (Escherichia coli and Staphylococcus aureus) on specimen(5cm x 5cm), a sterilized film(4cm x 4cm) is adhered and left in a thermo-hygrostat with a relative humidity of 90% or more at 35°C for 24 hours, and then the efficiency of killing of the bacteria is measured / Test agency: KOTITI Testing & Research Institute)


Advanced convenience

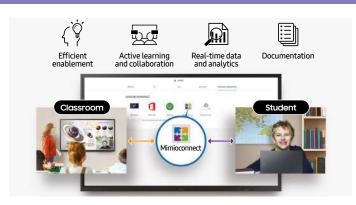

Explore trusted educational solutions Upgrade

Samsung partnered closely with Boxlight, a leading US education solution, to deliver fully optimized and innovative education software* directly to Flip 3. Now, educators can access Boxlight's extensive catalog of versatile learning content for hassle-free lesson planning.

- * Accessible through a web browser shortcut. Full app availability available through a future software update.
- * Requires Boxlight registration and subscription to use this service.

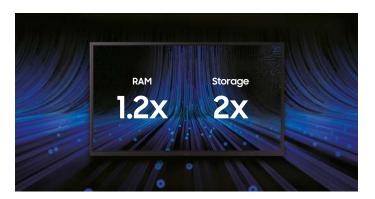

Faster operation for seamless interactions Upgrade

Power faster device interactions with less load time with 20% more memory (RAM). Or download and save more interactive content while enjoying consistent, reliable performance thanks to two times more storage capacity.

* When compared to Samsung Flip 2.



Seamless Streaming with AirPlay 2 Upgrade

With AirPlay 2 built-in, it's easier than ever for teachers to add videos to their lesson plans. With seamless, wire-free setups, educators can stream videos from their personal Apple device to the classroom Flip 3 to maximize education time.

- ${}^{\star}\text{This service may not be available at the time of purchase of this product and the availability may vary by region.}\\$
- * Images simulated for illustration purpose only.
- * Availability of the feature and Graphic User Interface (GUI) may vary by region. Check before use



Conveniently source online content

Samsung Flip 3 now supports web browsing, allowing educators to access the internet directly through the display and source online educational material during their class, with no additional device needed. Now you can play videos or view sources without preloading in advance.

Easy sharing & presentation



Centralize lesson plans and school notifications

Use preferred third-party education solutions and connect to school information systems with the built-in OPS (Open Pluggable Specification) slot*. Flip 3 is a centralized source for classroom learning and school-wide notifications such as principal announcements, weather alerts and fire drills.

* Sold separately.



Connect any device with ease

Flip 3 features multiple connectivity options, including USB, HDMI, DP, and OPS, as well as wireless screen sharing, to ensure educators can easily access their content from any device. Flip 3 automatically recognizes any plugged-in source, giving you control of your files and media quickly.

Specifications

	Model		WM75A	WM85A
	Diago	nal Size	75"	85"
	Ty	ype	New edge, 60Hz	New Edge, 60Hz
	Resolution		3,840 x 2,160(Landscape)	3,840 x 2,160 (Landscape)
Panel	Brightness(Typ.)		350cd/m2(Without glass)	350cd/m2 (without glass)
	Display Color		16.7M	16.7M
	Viewing Angle(H/V)		178 : 178	178:178
	Response Time(G-to-G)		6ms(Typ.)	6ms(Typ.)
Sound	SpeakerType		Built in speaker(10W x 2CH)	Built in Speaker (10W x 2CH)
	RGB		N/A	N/A
	Input	Video	HDMI 2(rear1, front1), DP1, OPS I/F	HDMI 2(Rear1, Front1), DP1, OPS I/F
		Audio	N/A	N/A
		USB	2(For SoC, rear/front), 2(For external 2.0 x1/3.0 x1(front))	2(ForSoC, Rear/Front), 2 (for external 2.0 x1/3.0x1(Front))
		RGB	N/A	N/A
Connectivity	Output	Video	HDMI1(Screen share in front)	HDMI1 (Screen Share in Front)
		Audio	1(Stereo mini jack)	1(Stereo Mini Jack)
		Touch Out	Touch out 2(USB upstream type, front 1, rear 1)	Touch Out 2 (USB Upstream Type, Front 1, Rear 1)
		Sensor	N/A	N/A
	External	Control	Touch input RS232C thru stereo jack, RJ45(For MDC)	Touch Input RS232C thru stereo jack, RJ45(For MDC)
	BT/WiFi		Yes(Keyboard/Mouse)	Yes (Keyboard/Mouse)
	Туре		IR	IR
	# of Drawing		4 drawing(Internal) 20 drawing(External)	4 drawing (Internal) 20 touch (External)
	Touch Pen Type		Passive pen with magnet	Passive Pen with magnet
Touch	Object Recognition Range		2mm/4mm/8mm/50mm (Brush mode : Dynamic object recognition)	2mm/4mm/8mm/50mm (Brush Mode : Dynamic Object Recognition)
roue	Haze		8%~12%	8%~12%
	Thickness		3.2T	3.2T
	Hardness		Heat semi-strengthened glass	Heat Semi-Strengthened Glass
	Additional Film		AG, Hydrophobic coated PET	AG, Hydrophobic Coated PET
	Туре		Internal(Main1ea, OPS1ea)	Internal (Main1ea, OPS1ea)
	Power Supply		AC100~240V 50/60Hz	AC100~240V 50/60Hz
	Power Consumption	Max[W/h]	275	418 (OPS 19V/3.7A)
Power		Typical[W/h]	115	151
		Rating[W/h]	250	380 (OPS19V/3.7A)
		Stand-by[W/h]	0.5	0.5
		BTU[W/h]	937.75	1,425.38 (OPS19V/3.7A)
	Dimension(mm)	Set	1,721 x 1,019.3 x 75.2 mm	1942.8 x 1144.1 x 69.4 mm
	(WxHxD)	Package	1,905 x 1,182 x 287 mm	2136 x 1311 x 260 mm
		Set	58.3 kg	74.5 kg
	Weight (kg)	Package	71.7 kg	91.5 kg
	C	-	Charcoal black	-
	U	olor		Charcoal Black
Mechanical		olor Mount	400 x 400	Charcoal Black 600 x 400
Mechanical Spec	VESA		400 x 400 Yes	
	VESA Protect	Mount tion Glass	Yes	600 x 400 Yes
	VESA Protect Stan	Mount tion Glass d Type	Yes Wall mount	600 x 400 Yes Wall Mount
	VESA Protect Stan Media Playe	Mount tion Glass Id Type er Option Type	Yes Wall mount OPS slot support	600 x 400 Yes Wall Mount OPS Slot support
	VESA Protect Stan Media Playe Rot	Mount tion Glass Id Type er Option Type tation	Yes Wall mount OPS slot support Landscape only	600 x 400 Yes Wall Mount OPS Slot support Landscape only
	VESA Protect Stan Media Playe Rot Power Ca	Mount tion Glass Id Type er Option Type tation able Length	Yes Wall mount OPS slot support Landscape only 3M/2.4M(US)	600 x 400 Yes Wall Mount OPS Slot support Landscape only 3M /2.4M(US)
	VESA Protect Stan Media Playe Rot Power Ca Acco	Mount tion Glass d Type er Option Type tation able Length essory	Yes Wall mount OPS slot support Landscape only 3M/2.4M(US) Power cord, USB upstream cable(2ea), Pen(2ea, Black), OPS box, Waranty/QSG	600 x 400 Yes Wall Mount OPS Slot support Landscape only 3M /2.4M(US) Power Cord, USB Upstream Cable(2ea), Pen(2ea, Black), OPS Box, Waranty/QSC
Spec	VESA Protect Stan Media Playe Rot Power Ca Accc	Mount tion Glass d Type er Option Type tation ble Length essory Temperature	Yes Wall mount OPS slot support Landscape only 3M/2.4M(US) Power cord, USB upstream cable(2ea), Pen(2ea, Black), OPS box, Waranty/QSG 0°C~40°C	600 x 400 Yes Wall Mount OPS Slot support Landscape only 3M /2.4M(US) Power Cord, USB Upstream Cable(2ea), Pen(2ea, Black), OPS Box, Waranty/QSC 0°C~40°C
Spec	VESA Protect Stan Media Playe Rot Power Ca Accc Operating	Mount tion Glass d Type er Option Type tation ble Length essory Temperature nidity	Yes Wall mount OPS slot support Landscape only 3M/2.4M(US) Power cord, USB upstream cable(2ea), Pen(2ea, Black), OPS box, Waranty/QSG 0°C~40°C 10%~80%, non-condensing	600 x 400 Yes Wall Mount OPS Slot support Landscape only 3M /2.4M(US) Power Cord, USB Upstream Cable(2ea), Pen(2ea, Black), OPS Box, Waranty/QSC 0°C~40°C 10~80%, non-condensing
Spec	VESA Protect Stan Media Playe Rot Power Ca Acco Operating Hur	Mount tion Glass d Type er Option Type tation table Length essory Temperature midity Key	Yes Wall mount OPS slot support Landscape only 3M/2.4M(US) Power cord, USB upstream cable(2ea), Pen(2ea, Black), OPS box, Waranty/QSG 0°C~40°C 10%~80%, non-condensing Flip app	600 x 400 Yes Wall Mount OPS Slot support Landscape only 3M /2.4M(US) Power Cord, USB Upstream Cable(2ea), Pen(2ea, Black), OPS Box, Waranty/QSC 0°C~40°C 10~80%, non-condensing Flip App
	VESA Protect Stan Media Playe Rot Power Ca Acco Operating Hur	Mount tion Glass d Type er Option Type tation ble Length essory Temperature nidity	Yes Wall mount OPS slot support Landscape only 3M/2.4M(US) Power cord, USB upstream cable(2ea), Pen(2ea, Black), OPS box, Waranty/QSG 0°C~40°C 10%~80%, non-condensing Flip app Landscape	600 x 400 Yes Wall Mount OPS Slot support Landscape only 3M /2.4M(US) Power Cord, USB Upstream Cable(2ea), Pen(2ea, Black), OPS Box, Waranty/QSC 0°C~40°C 10~80%, non-condensing Flip App Landscape
Spec	VESA Protect Stan Media Playe Rot Power Ca Acco Operating Hur	Mount tion Glass d Type er Option Type tation table Length essory Temperature midity Key	Yes Wall mount OPS slot support Landscape only 3M/2.4M(US) Power cord, USB upstream cable(2ea), Pen(2ea, Black), OPS box, Waranty/QSG 0°C~40°C 10%~80%, non-condensing Flip app Landscape Touch overlay(IR), Front connectivity, OPS I/F support(w/OPS Box)	600 x 400 Yes Wall Mount OPS Slot support Landscape only 3M /2.4M(US) Power Cord, USB Upstream Cable(2ea), Pen(2ea, Black), OPS Box, Waranty/QSC 0°C-40°C 10 ~ 80%, non-condensing Flip App Landscape Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS Box)
Spec	VESA Protect Stan Media Playe Rot Power Ca Acco Operating Hur	Mount tion Glass d Type er Option Type tation able Length essory Temperature midity Key ntation	Yes Wall mount OPS slot support Landscape only 3M/2.4M(US) Power cord, USB upstream cable(2ea), Pen(2ea, Black), OPS box, Waranty/QSG 0°C~40°C 10%~80%, non-condensing Flip app Landscape	600 x 400 Yes Wall Mount OPS Slot support Landscape only 3M /2.4M(US) Power Cord, USB Upstream Cable(2ea), Pen(2ea, Black), OPS Box, Waranty/QSC 0°C- 40°C 10 ~ 80%, non-condensing Flip App Landscape Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS Box) Built in Speaker(10W x 2), WiFi/BT Module Embedded
Spec	VESA Protect Stan Media Playe Rot Power Ca Acco Operating Hur Porie	Mount tion Glass d Type er Option Type tation able Length essory Temperature midity Key ntation H/W	Yes Wall mount OPS slot support Landscape only 3M/2.4M(US) Power cord, USB upstream cable(2ea), Pen(2ea, Black), OPS box, Waranty/QSG 0°C-40°C 10%-80%, non-condensing Flip app Landscape Touch overlay(IR), Front connectivity, OPS I/F support(w/OPS Box) Built in speaker(10W x 2), WiFi/BT module embedded	600 x 400 Yes Wall Mount OPS Slot support Landscape only 3M /2.4M(US) Power Cord, USB Upstream Cable(2ea), Pen(2ea, Black), OPS Box, Waranty/QSC 0°C-40°C 10 ~ 80%, non-condensing Flip App Landscape Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS Box)
Spec	VESA Protect Stan Media Playe Rot Power Ca Acco Operating Hur Porie	Mount Ition Glass Id Type er Option Type tation Ible Length essory Temperature Indity Key Intation I H/W I S/W	Yes Wall mount OPS slot support Landscape only 3M/2.4M(US) Power cord, USB upstream cable(2ea), Pen(2ea, Black), OPS box, Waranty/QSG 0°C~40°C 10%~80%, non-condensing Flip app Landscape Touch overlay(IR), Front connectivity, OPS I/F support(w/OPS Box) Built in speaker(10W x 2), WiFi/BT module embedded Flip S/W Muse-M(Tizen 6.0)	600 x 400 Yes Wall Mount OPS Slot support Landscape only 3M /2.4M(US) Power Cord, USB Upstream Cable(2ea), Pen(2ea, Black), OPS Box, Waranty/QSC 0°C- 40°C 10 ~ 80%, non-condensing Flip App Landscape Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS Box) Built in Speaker(10W x 2), WiFi/BT Module Embedded Flip S/W Muse-M (Tizen 6.0)
Spec	VESA Protect Stan Media Playe Rot Power Ca Acco Operating Hur Porie	Mount Ition Glass Id Type Irror Option Type Itation In Irror Option Type Itation Italian Itation Itati	Yes Wall mount OPS slot support Landscape only 3M/2.4M(US) Power cord, USB upstream cable(2ea), Pen(2ea, Black), OPS box, Waranty/QSG 0°C~40°C 10%~80%, non-condensing Flip app Landscape Touch overlay(IR), Front connectivity, OPS I/F support(w/OPS Box) Built in speaker(10W x 2), WiFi/BT module embedded Flip S/W Muse-M(Tizen 6.0) CA72 quad(1.7GHz) 2MB L2	600 x 400 Yes Wall Mount OPS Slot support Landscape only 3M /2.4M(US) Power Cord, USB Upstream Cable(2ea), Pen(2ea, Black), OPS Box, Waranty/QSC 0°C ~ 40°C 10 ~ 80%, non-condensing Flip App Landscape Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS Box) Built in Speaker(10W x 2), WiFi/BT Module Embedded Flip S/W Muse-M (Tizen 6.0) CA72 Quad(1.7GHz) 2MB L2
Spec	VESA Protect Stan Media Playe Rot Power Ca Acco Operating Hur Porie	Mount tion Glass d Type er Option Type tation bble Length essory Temperature midity Key htation H/W S/W Platform Processor On-Chip Cache Memory	Yes Wall mount OPS slot support Landscape only 3M/2.4M(US) Power cord, USB upstream cable(2ea), Pen(2ea, Black), OPS box, Waranty/QSG 0°C~40°C 10%~80%, non-condensing Flip app Landscape Touch overlay(IR), Front connectivity, OPS I/F support(w/OPS Box) Built in speaker(10W x 2), WiFi/BT module embedded Flip S/W Muse-M(Tizen 6.0) CA72 quad(1.7GHz) 2MB L2 L2: 2MB	600 x 400 Yes Wall Mount OPS Slot support Landscape only 3M /2.4M(US) Power Cord, USB Upstream Cable(2ea), Pen(2ea, Black), OPS Box, Waranty/QSC 0°C~ 40°C 10~80%, non-condensing Flip App Landscape Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS Box) Built in Speaker(10W x 2), WiFi/BT Module Embedded Flip S/W Muse-M (Tizen 6.0) CA72 Quad(1,7GHz) 2MB L2 L2: 2MB
Spec Operation	VESA Protect Stan Media Playe Rot Power Ca Acco Operating Hur Porie	Mount tion Glass d Type er Option Type tation able Length essory Temperature midity key ntation H/W S/W Platform Processor On-Chip Cache Memory Clock Speed	Yes Wall mount OPS slot support Landscape only 3M/2.4M(US) Power cord, USB upstream cable(2ea), Pen(2ea, Black), OPS box, Waranty/QSG 0°C~40°C 10%~80%, non-condensing Flip app Landscape Touch overlay(IR), Front connectivity, OPS I/F support(w/OPS Box) Built in speaker(10W x 2), WiFi/BT module embedded Flip S/W Muse-M(Tizen 6.0) CA72 quad(1.7GHz) 2MB L2	600 x 400 Yes Wall Mount OPS Slot support Landscape only 3M /2.4M(US) Power Cord, USB Upstream Cable(2ea), Pen(2ea, Black), OPS Box, Waranty/QSC 0°C ~ 40°C 10 ~ 80%, non-condensing Flip App Landscape Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS Box) Built in Speaker(10W x 2), WiFi/BT Module Embedded Flip S/W Muse-M (Tizen 6.0) CA72 Quad(1.7GHz) 2MB L2
Spec	VESA Protect Stan Media Playe Rot Power Ca Acco Operating Hur P Special	Mount tion Glass d Type er Option Type tation bble Length essory Temperature midity Key htation H/W S/W Platform Processor On-Chip Cache Memory	Yes Wall mount OPS slot support Landscape only 3M/2.4M(US) Power cord, USB upstream cable(2ea), Pen(2ea, Black), OPS box, Waranty/QSG 0°C~40°C 10%~80%, non-condensing Flip app Landscape Touch overlay(IR), Front connectivity, OPS I/F support(w/OPS Box) Built in speaker(10W x 2), WiFi/BT module embedded Flip S/W Muse-M(Tizen 6.0) CA72 quad(1.7GHz) 2MB L2 L2: 2MB	600 x 400 Yes Wall Mount OPS Slot support Landscape only 3M /2.4M(US) Power Cord, USB Upstream Cable(2ea), Pen(2ea, Black), OPS Box, Waranty/QSC 0°C~ 40°C 10~80%, non-condensing Flip App Landscape Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS Box) Built in Speaker(10W x 2), WiFi/BT Module Embedded Flip S/W Muse-M (Tizen 6.0) CA72 Quad(1,7GHz) 2MB L2 L2: 2MB
Spec	VESA Protect Stan Media Playe Rot Power Ca Acco Operating Hur Porier	Mount Ition Glass Id Type Ition Glass Id Type Ition Type Itation Ition	Yes Wall mount OPS slot support Landscape only 3M/2.4M(US) Power cord, USB upstream cable(2ea), Pen(2ea, Black), OPS box, Waranty/QSG 0°C~40°C 10%~80%, non-condensing Flip app Landscape Touch overlay(IR), Front connectivity, OPS I/F support(w/OPS Box) Built in speaker(10W x 2), WiFi/BT module embedded Flip S/W Muse-M(Tizen 6.0) CA72 quad(1.7GHz) 2MB L2 L2: 2MB 1.7GHz CPU quad	600 x 400 Yes Wall Mount OPS Slot support Landscape only 3M /2.4M(US) Power Cord, USB Upstream Cable(2ea), Pen(2ea, Black), OPS Box, Waranty/QSC 0°C- 40°C 10 ~ 80%, non-condensing Flip App Landscape Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS Box) Built in Speaker(10W x 2), WiFi/BT Module Embedded Flip S/W Muse-M (Tizen 6.0) CA72 Quad(1.7GHz) 2MB L2 L2 : 2MB 1.7GHz CPU Quad
Spec	VESA Protect Stan Media Playe Rot Power Ca Acco Operating Hur P Special	Mount Ition Glass Id Type Irror Option Type Itation In Ition Ition	Yes Wall mount OPS slot support Landscape only 3M/2.4M(US) Power cord, USB upstream cable(2ea), Pen(2ea, Black), OPS box, Waranty/QSG 0°C~40°C 10%~80%, non-condensing Flip app Landscape Touch overlay(IR), Front connectivity, OPS I/F support(w/OPS Box) Built in speaker(10W x 2), WiFi/BT module embedded Flip S/W Muse-M(Tizen 6.0) CA72 quad(1.7GHz) 2MB L2 L2 : 2MB 1.7GHz CPU quad LPDDR41.6GHz 64bit 3.0GB	600 x 400 Yes Wall Mount OPS Slot support Landscape only 3M /2.4M(US) Power Cord, USB Upstream Cable(2ea), Pen(2ea, Black), OPS Box, Waranty/QSC 0°C- 40°C 10 ~ 80%, non-condensing Flip App Landscape Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS Box) Built in Speaker(10W x 2), WiFI/BT Module Embedded Flip S/W Muse-M (Tizen 6.0) CA72 Quad(1.7GHz) 2MB L2 L2 : 2MB 1.7GHz CPU Quad LPDDR41.6GHz 64bit 3.0GB
Spec	VESA Protect Stan Media Playe Rot Power Ca Acco Operating Hur P Special	Mount Ition Glass Id Type Irion Glass Id Type Irion Glass Id Type Irion Glass Id Type Irion Glass Irion	Yes Wall mount OPS slot support Landscape only 3M/2.4M(US) Power cord, USB upstream cable(2ea), Pen(2ea, Black), OPS box, Waranty/QSG 0°C~40°C 10%~80%, non-condensing Flip app Landscape Touch overlay(IR), Front connectivity, OPS I/F support(w/OPS Box) Built in speaker(10W x 2), WiFi/BT module embedded Flip S/W Muse-M(Tizen 6.0) CA72 quad(1.7GHz) 2MB L2 L2 : 2MB 1.7GHz CPU quad LPDDR41.6GHz 64bit 3.0GB GPU : MaliG51 MP4@760MHz	600 x 400 Yes Wall Mount OPS Slot support Landscape only 3M /2.4M(US) Power Cord, USB Upstream Cable(2ea), Pen(2ea, Black), OPS Box, Waranty/QSC 0°C− 40°C 10 ~ 80%, non-condensing Flip App Landscape Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS Box) Built in Speaker(10W x 2), WiFi/BT Module Embedded Flip S/W Muse-M (Tizen 6.0) CA72 Quad(1.7GHz) 2MB L2 L2 : 2MB 1.7GHz CPU Quad LPDDR41.6GHz 64bit 3.0GB GPU : MaliG51 MP4@760MHz
Spec	VESA Protect Stan Media Playe Rot Power Ca Acco Operating Hur P Special	Mount Ition Glass Id Type Ition Glass Id Type Ition Glass Id Type Ition Ition Ition Ition Ition Ition Ition Itini Ition	Yes Wall mount OPS slot support Landscape only 3M/2.4M(US) Power cord, USB upstream cable(2ea), Pen(2ea, Black), OPS box, Waranty/QSG 0°C~40°C 10%~80%, non-condensing Flip app Landscape Touch overlay(IR), Front connectivity, OPS I/F support(w/OPS Box) Built in speaker(10W x 2), WiFi/BT module embedded Flip S/W Muse-M(Tizen 6.0) CA72 quad(1.7GHz) 2MB L2 L2 : 2MB 1.7GHz CPU quad LPDDR41.6GHz 64bit 3.0GB GPU : MaliG51 MP4@760MHz 16GB USB 2.0	600 x 400 Yes Wall Mount OPS Slot support Landscape only 3M /2.4M(US) Power Cord, USB Upstream Cable(2ea), Pen(2ea, Black), OPS Box, Waranty/QSC 0°C- 40°C 10 - 80%, non-condensing Flip App Landscape Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS Box) Built in Speaker(10W x 2), WiFi/BT Module Embedded Flip S/W Muse-M (Tizen 6.0) CA72 Quad(1.7GHz) 2MB L2 L2 : 2MB 1.7GHz CPU Quad LPDDR41.6GHz 64bit 3.0GB GPU : MaliG51 MP4@760MHz 16GB USB 2.0
Spec Operation	VESA Protect Stan Media Playe Rot Power Ca Acco Operating Hur F Ories Special	Mount Ition Glass Id Type Ition Glass Id Type Ition	Yes Wall mount OPS slot support Landscape only 3M/2.4M(US) Power cord, USB upstream cable(2ea), Pen(2ea, Black), OPS box, Waranty/QSG O°C~40°C 10%~80%, non-condensing Flip app Landscape Touch overlay(IR), Front connectivity, OPS I/F support(w/OPS Box) Built in speaker(10W x 2), WiFi/BT module embedded Flip S/W Muse-M(Tizen 6.0) CA72 quad(1.7GHz) 2MB L2 L2 : 2MB 1.7GHz CPU quad LPDDR41.6GHz 64bit 3.0GB GPU : MaliGS1 MP4@760MHz 16GB USB 2.0 Tizen 6.0 : Samsung proprietary OS(VDLinux)	600 x 400 Yes Wall Mount OPS Slot support Landscape only 3M /2.4M(US) Power Cord, USB Upstream Cable(2ea), Pen(2ea, Black), OPS Box, Waranty/QSC 0°C- 40°C 10 ~ 80%, non-condensing Flip App Landscape Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS Box) Built in Speaker(10W x 2), WiFi/BT Module Embedded Flip S/W Muse-M (Tizen 6.0) CA72 Quad(1.7GHz) 2MB L2 L2 : 2MB 1.7GHz CPU Quad LPDDR41.6GHz 64bit 3.0GB GPU : MaliG51 MP4@760MHz 16GB USB 2.0 Tizen 6.0 : Samsung Proprietary OS(VDLinux)
Spec Operation	VESA Protect Stan Media Playe Rot Power Ca Acco Operating Hur P Ories Special	Mount Ition Glass Id Type Ition Glass Id Type Ition Glass Id Type Ition Ition Ition Ition Ition Ition Ition Itini Ition	Yes Wall mount OPS slot support Landscape only 3M/2.4M(US) Power cord, USB upstream cable(2ea), Pen(2ea, Black), OPS box, Waranty/QSG 0°C~40°C 10%~80%, non-condensing Flip app Landscape Touch overlay(IR), Front connectivity, OPS I/F support(w/OPS Box) Built in speaker(10W x 2), WiFi/BT module embedded Flip S/W Muse-M(Tizen 6.0) CA72 quad(1.7GHz) 2MB L2 L2 : 2MB 1.7GHz CPU quad LPDDR41.6GHz 64bit 3.0GB GPU : MaliGS1 MP4@760MHz 16GB USB 2.0 Tizen 6.0 : Samsung proprietary OS(VDLinux) 802.1x(WPA2 enterprise) : EAP-TLS, EAP-PEAP	600 x 400 Yes Wall Mount OPS Slot support Landscape only 3M /2.4M(US) Power Cord, USB Upstream Cable(2ea), Pen(2ea, Black), OPS Box, Waranty/QSC 0°C- 40°C 10 ~ 80%, non-condensing Flip App Landscape Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS Box) Built in Speaker(10W x 2), WiFi/BT Module Embedded Flip S/W Muse-M (Tizen 6.0) CA72 Quad(1.7GHz) 2MB L2 L2 : 2MB 1.7GHz CPU Quad LPDDR41.6GHz 64bit 3.0GB GPU : MaliG51 MP4@760MHz 16GB USB 2.0 Tizen 6.0 : Samsung Proprietary OS(VDLinux) 802.1x(WPA2 Enterprise) : EAP-TLS, EAP-TTLS, EAP-PEAP
Spec Operation	VESA Protect Stan Media Playe Rot Power Ca Acco Operating Hur P Ories Special	Mount Ition Glass Id Type Ition Glass Id Type Ition	Yes Wall mount OPS slot support Landscape only 3M/2.4M(US) Power cord, USB upstream cable(2ea), Pen(2ea, Black), OPS box, Waranty/QSG O°C~40°C 10%~80%, non-condensing Flip app Landscape Touch overlay(IR), Front connectivity, OPS I/F support(w/OPS Box) Built in speaker(10W x 2), WiFi/BT module embedded Flip S/W Muse-M(Tizen 6.0) CA72 quad(1.7GHz) 2MB L2 L2 : 2MB 1.7GHz CPU quad LPDDR41.6GHz 64bit 3.0GB GPU : MaliGS1 MP4@760MHz 16GB USB 2.0 Tizen 6.0 : Samsung proprietary OS(VDLinux)	600 x 400 Yes Wall Mount OPS Slot support Landscape only 3M /2.4M(US) Power Cord, USB Upstream Cable(2ea), Pen(2ea, Black), OPS Box, Waranty/QSC 0°C- 40°C 10 ~ 80%, non-condensing Flip App Landscape Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS Box) Built in Speaker(10W x 2), WiFi/BT Module Embedded Flip S/W Muse-M (Tizen 6.0) CA72 Quad(1.7GHz) 2MB L2 L2 : 2MB 1.7GHz CPU Quad LPDDR41.6GHz 64bit 3.0GB GPU : MaliG51 MP4@760MHz 16GB USB 2.0 Tizen 6.0 : Samsung Proprietary OS(VDLinux)